

Product datasheet: PD06

# RHINO-HF+2/3/4

Premium Multi-Performance Rated Door Sets



Rhino Doors

THE STRENGTH TO PROTECT

Rhino-HF+ premium multi-performance fire rated doors are used for internal and external applications in commercial and industrial buildings.

RHINO-HF+ door sets are designed and manufactured to BS EN 9001 Quality Assurance Standards. They have been fully fire tested at Warrington Fire and are CERTIFIRE third party product certified to comply with BS EN 1634-1.

Performance ratings: Up to E240 (integrity only) to EN1634-1: CERTIFIRE certificate no CF5786  
Physical attack resistance certified by the Loss Prevention Certification Board (LPCB) to LPS 1175 (Issue 7) levels SR2, SR3 & SR4.  
Blast rated up to 10kPa  
Static pressure rated to 10kPa

Configurations: Single swing  
Single, double and unequal leaf  
Fixed/Removable over panels  
Side panels

Leaf: 66mm thick with 1.5mm zintec coated steel skins with a rebated leading edge and a steel stiffened core  
9 No dog bolts on the hinge edge  
Astragal 10mm steel

Frame: 110mm deep single rebate profile  
brake-pressed from 2mm thick zintec coated steel


Threshold: 15mm low profile aluminium or steel raised threshold with integral tubular silicone rubber seal)

Seals: Tubular silicone rubber located in the frame rebate on three sides

Ironmongery: 3 No stainless-steel butt hinges per leaf  
Overhead closers

Vision panels Choice of sizes

Surface finish: PPC to any RAL colour as standard

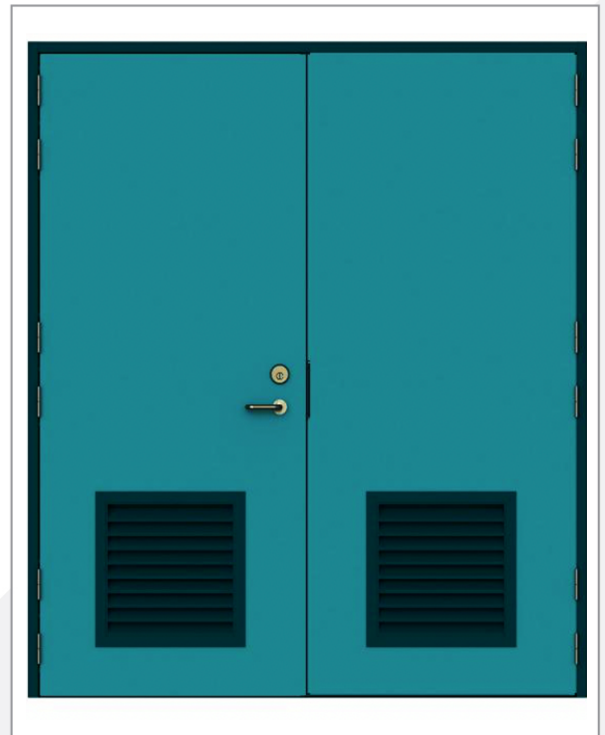

## Contact Details

### Rhino Systems Ltd

Maritime Road  
Llewellyns Quay  
Port Talbot  
SA13 1RF

T: +44 (0)1639 888 119

F: +44 (0)1639 898 119

[enquiries@rhinodoors.com](mailto:enquiries@rhinodoors.com)

[www.rhinodoors.com](http://www.rhinodoors.com)



'A portfolio company of Cyrus Investment Management LLP'