

RHINO-HF


Fire Rated Door Set



THE STRENGTH TO PROTECT

Rhino-HF fire rated doors are used for fire compartmentalisation purposes inside commercial and industrial buildings.

- Fire rating:** Up to E240 (integrity only) to EN1634-1
CERTIFIRE certificate no. **CF5821**
- Configurations:** Single swing
Single, double and unequal leaf
Fixed/Removable over panels
Side panels
Latched and un-latched
- Construction details:**
- Leaf:** 45mm thick with 1.2mm zintec coated steel skins with a rebated leading edge and a bonded structural honeycomb core
7 No heavy-duty dog bolts on the hinge edge
- Frame:** 90mm to 150mm deep butt jointed, single rebate profile brake-pressed from 1.5mm thick zintec coated steel
- Threshold:** 15mm aluminium raised threshold with integral tubular silicone rubber seal
- Seals:** Tubular silicone rubber located in the frame rebate on three sides
- Ironmongery:** 3 No stainless-steel butt hinges per leaf
Overhead closers
- Vision panels:** Choice of sizes
- Surface finish:** PPC to any RAL colour as standard

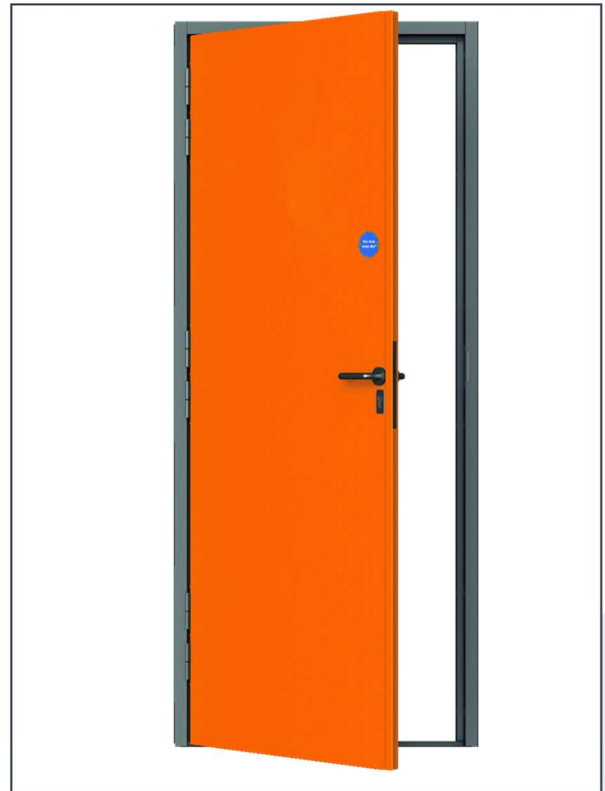

Contact details

Rhino Systems Limited

Maritime Road
Llewellyns Quay
Port Talbot
SA13 1RF

T: +44 (0) 1639 888 119

info@rhinodoors.com
www.rhinodoors.com



Raising Standards
Advancing Safety

