

RHINO-FD90HL




Premium Fire Rated Door Sets

THE STRENGTH TO PROTECT

Rhino-FD90HL premium fire rated latch-less doors are used mainly for internal and external applications in commercial and industrial buildings.

- Performance ratings:** Up to E90 (integrity only) to EN1634-1. Standard smoke control leakage to EN1634-3: 2004; $3.0\text{m}^3/\text{m}^2/\text{h}$ at 25Pa.
- Certificate No.** IFCC 1666
<https://www.ifccertification.com/>
- Configurations:** Single swing
Single, double and unequal leaf, normally held open option. Clear openings up to 4000 x 2640mm
- Leaf:** 92mm thick with 1.5mm stainless steel skins with a stainless steel stiffened core
- Edge:** Flush
- Frame:** 150mm deep single rebate profile from 1.5mm thick stainless steel
- Threshold:** None
- Seals:** Intumescent fire and smoke strip mounted in adjustable stainless steel trims on three Sides of leaves
- Ironmongery:** Floor concealed door closer and top pivot
Custom recessed pull handles
- Vision panels:** Choice of sizes
- Surface finish:** Stainless Steel (any finish) or carbon steel with PPC to any

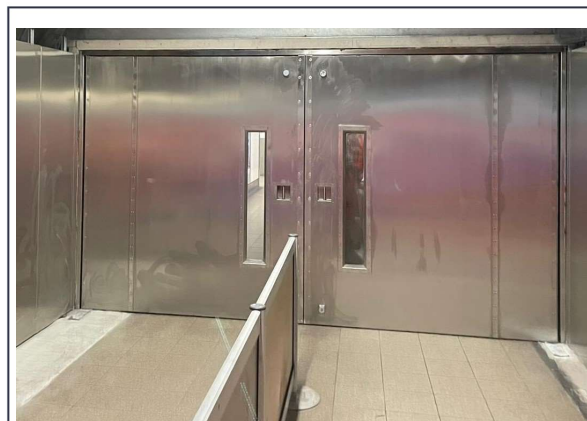

INWARD OR OUTWARD OPENING



Contact details

Rhino Systems Limited

Maritime Road
Llewellyns Quay
Port Talbot
SA13 1RF

T: +44 (0) 1639 888 119

info@rhinodoors.com
www.rhinodoors.com



Raising Standards
Advancing Safety

