


RHINO-HF^{2/3/4}

PREMIUM MULTI-PERFORMANCE RATED DOOR SETS

PRODUCT DATASHEET: **PD06**

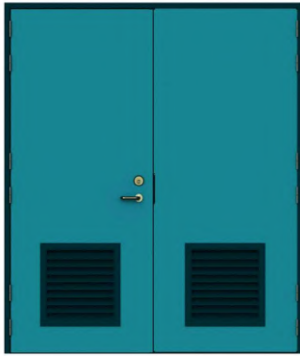

Rhino-HF⁺
Double Leaf



Rhino-HF⁺
Single Leaf



Rhino-HF⁺ premium multi-performance fire rated doors are used for internal and external applications in commercial and industrial buildings.

The superscript number HF², HF³ or HF⁴ refers to the security rating SR2, SR3 or SR4 respectively.

Performance ratings

Up to E240 (integrity only) to EN1634-1: CERTIFIRE certificate no **CF5786**

Physical attack resistance certified by the Loss Prevention

Certification Board (LPCB) to LPS 1175 (Issue 7) levels SR2, SR3 & SR4.

Blast rated up to 10kPa

Static pressure rated to 10kPa

Configurations

Single swing

Single, double and unequal leaf

Fixed/Removable over panels

Side panels

Leaf

66mm thick with 1.5mm zintec coated steel skins with a rebated leading edge and a steel stiffened core

9 No dog bolts on the hinge edge

Astragal 10mm steel

Frame

110mm deep single rebate profile brake-pressed from 2mm thick zintec coated steel

Threshold

15mm low profile aluminium or steel raised threshold with integral tubular silicone rubber seal

Seals

Tubular silicone rubber located in the frame rebate on three sides

Ironmongery

3 No stainless-steel butt hinges per leaf

Overhead closers

Vision panels

Choice of sizes

Surface finish

PPC to any RAL colour as standard