

RHINO-FD120HL

Premium Fire Rated Door Sets



Rhino Doors

THE STRENGTH TO PROTECT

Rhino-FD120HL premium fire rated latched doors are used mainly for internal and external applications in commercial and industrial buildings.

RHINO-FD120HL door sets are designed and manufactured under a Quality Management System certified to meet the requirements of BS EN ISO 9001. They have been fully fire tested at Warringtonfire.

Performance ratings: Up to E120 (integrity only) to EN1634-1.

Configurations: Single swing
Double and unequal leaf, normally held open option.
Clear openings up to 2120 x 2100mm

Leaf: 55mm thick with 1.5mm stainless steel skins with a stainless steel stiffened core
Non-rebated leading edge to allow independent leaf operation

Edge Flush

Frame: 120mm deep single rebate profile from 2.0mm thick stainless steel


Threshold: None

Seals: Intumescent fire and smoke strip on three sides of leaves

Ironmongery: 3 No. stainless steel butt hinges per leaf
Concealed panic bolts with lever handle / push pad operation
Overhead closers

Vision panels Choice of sizes

Surface finish: Stainless Steel (any finish) or carbon steel with PPC to any RAL colour as standard

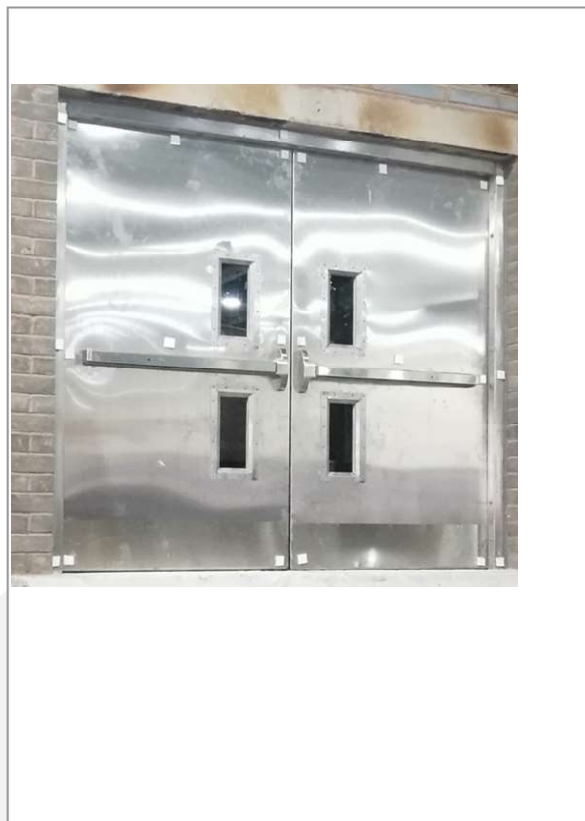

Contact Details

Rhino Systems Ltd

Maritime Road
Llewellyns Quay
Port Talbot
SA13 1RF

T: +44 (0)1639 888 119

enquiries@rhinodoors.com
www.rhinodoors.com

